

# ICE® Model 66C Hydraulic Vibratory Driver/ Extractor with Model 800G Power Unit




WWW.ICEUSA.COM  
888-ICE-USA1

Highest frequency (1600 vpm) and driving force (245 tons, 2200 kN) in its class  
800 HP (597 kW) CAT C18 meets EPA Tier 2/EU Stage II engine emission regulations  
Up to 125 tons (1125 kN) line pull for extraction



ICE Model 66C Vibratory Pile Hammer		
Eccentric moment	6600 in-lbs	76 kg-m
Maximum frequency	1600 vpm	
Driving Force	245 tons	2200 kN
Centrifugal force	240 tons	2135 kN
Amplitude (free w/o clamp)	1.23 in	31 mm
Standard line pull for extracting	95 tons	850 kN
Maximum line pull for extracting	125 tons	1125 kN
Weight (no clamp or hoses)	15250 lbs	6920 kg
Non-vibrating Weight	4560 lbs	2070 kg
Height without clamp (H)	101 in	2550 mm
Length (L)	98 in	2485 mm
Width (W)	21 in	530 mm
Throat width (TW)	14.25 in	362 mm
Hydraulic hose length	150 ft	45 m
Hydraulic hose weight	2400 lbs	1090 kg
Height with sheeting clamp (HH)	139 in	3515 mm
Weight with sheeting clamp & 1/2 hoses	19250 lbs	8735 kg
Height with beam & caisson clamps	144 in	3660 mm
Weight with beam, caisson clamps & 1/2 hoses	20950 lbs	9505 kg

ICE Model 800G Power Unit			
Engine	Caterpillar C18		
EPA/EU Emissions rating	EPA Flex	EU Flex	
Power	800 HP	597 kW	
Operating speed	1800 rpm	1800 rpm	
Maximum motors pressure	5200 psi	345 bar	
Motors flow (no load)	250 gpm	900 lpm	
Clamp pressure	4500 psi	310 bar	
Clamp flow	6 gpm	20 lpm	
Weight (w/ full fluid & 1/2 fuel)	26500 lbs	12020 kg	
Length	218 in	5540 mm	
Width	80 in	2035 mm	
Height	104 in	2630 mm	
Hydraulic oil capacity	550 gal	2080 liters	
Fuel Capacity	200 gal	750 liters	

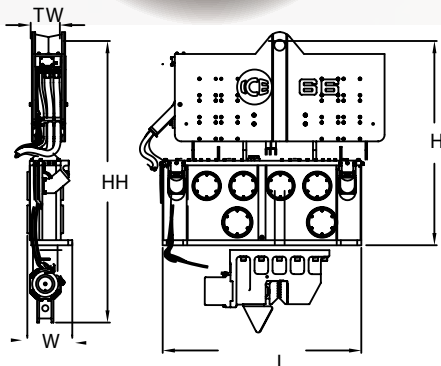

DESIGNED AND MANUFACTURED IN USA BY ICE®  
WORLD LEADER IN COST-EFFECTIVE FOUNDATION EQUIPMENT SINCE 1974.

Constant improvement and engineering progress make it necessary that ICE®, Inc reserve the right to make specification changes without notice.  
Please consult ICE® for the latest available information.